品质铸就未来，诚信赢得天下
Quality forges the future,
integrity conquers the world.

红图广告：138 2342 6081(微信)



400-088-1239
http://www.dongrongtw.com.
售后热线：0757-27787298

東榮智能开闭机有限公司
网站二维码
Main Website QR

東榮智能开闭机有限公司
公众号二维码
Wechat News QR

東榮智能开闭机有限公司
小程序二维码
Wechat App QR

東榮®
（臺灣）
DONG RONG

东荣智能开闭门机
产品介绍

Ai 智能科技引领未来
Technology leading future

東榮智能開閉門機有限公司
Dongrong Automatic Door Opener Co.,Ltd


東榮智能开闭机有限公司
网站二维码
Main Website QR

東榮智能开闭机有限公司
公众号二维码
Wechat News QR

ABOUT US
关于我们











东荣智能开闭门机有限公司成立于 1990 年，是一家自主研发和生产开闭门机系列专业的综合性生产厂家。主要产品有：快速卷帘门电机、储电式交直流卷帘门电机、平移门电机、伸缩门电机、一体道闸机、道闸机机芯和遥控器等系列产品。

本公司是老品牌企业，已经有二十多年的发展历史，深受国内外客户的肯定、青睐和支持。荣获了多项国内外荣誉，产品严格按照质量管理体系 ISO9001 和 CE、CQC、5C 等相关认证。产品美观，运行流畅，安装方便，安全耐用。并且还集遥控，读卡，车牌识别，WIFI 等多种功能。广泛适用于企业、工厂、商铺、仓库和家居车库等场所。



AC 一体道闸机

DC 一体道闸机

DR 快速卷帘门机

一体式道闸机芯

2T 卷帘门

平移门电机

Dongrong Automatic Door Opener Co., Ltd. was established in 1990 as a comprehensive manufacturer specializing in the independent R&D and production of door and gate motor systems. Our main products include: fast rolling shutter motors, rechargeable AC/DC rolling shutter motors, sliding gate motors, telescopic gate motors, built-in motors, barrier gate cores, remote controllers, and related accessories.

As a long-standing brand with over two decades of development, we have earned recognition and trust from clients worldwide. Our products comply with strict quality management standards, including ISO9001, CE, CQC, and 5C certifications. They are designed for aesthetics, smooth operation, easy installation, durability, and safety. Equipped with advanced features such as remote control, card readers, license plate recognition, and WiFi connectivity, our products are widely used in enterprises, factories, shops, warehouses, and residential garages.

2025-4-15-东荣电机-中英画册.indd 3-4
2025/4/16 19:22:48

東榮®
从 1990 年开始专注开门机


品牌内容 PRIDE DOORS&WINDOWS

二十世纪 30 年。欧美日韩发达国家已经在建筑领域大面积采用开闭门电机。80 年代初开闭门电机，卷帘门电机才逐步进入中国。发展至今仅二三十年。1990 年东荣智能开闭门机公司在宝岛中国台湾成立并注册东荣品牌商标。专业生产卷帘门电机等一系列开闭门电机。并承诺只专注于智能高端卷帘门电机开闭门电机的研发和生产。此后的二三十年间。东荣人从生产出第一套卷帘门电机开始，到今天成为中国卷帘门电机系列的智能开闭门电机市场占有率继续多年独占鳌头。东荣人只坚持生产高端卷帘电机等开闭门电机。

东荣成功的秘诀很简单，就是一直以来坚持用心专注于一件事：研发生产世界上最好的开闭门机。

In the 1930s, developed countries in Europe, America, Japan, and South Korea began widely adopting automatic door opener in the construction sector. By the early 1980s, these technologies gradually entered China. By 1990, Dongrong Automatic Door Opener Co., Ltd. was founded in Taiwan, China, officially registering the "Dongrong" brand. We committed to specializing in the R&D and production of high-end intelligent rolling shuttle door motors and related systems.

Over the next two to three decades, Dongrong evolved from producing its first rolling door motor to becoming a market leader in China’s intelligent door and gate motor industry. Our success stems from a singular focus: dedicating ourselves to developing and manufacturing the world’s finest door and gate motors. Dongrong’s philosophy is simple—we persistently devote ourselves to one mission: creating the best automatic door opener on the planet.

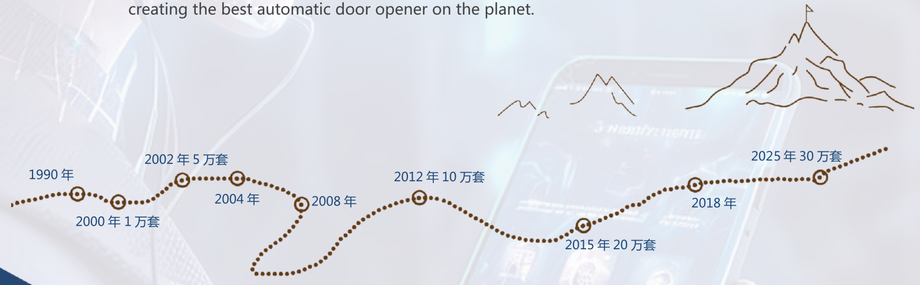

東榮® DongRong

品牌历程
PRIDE
DOORS &
WINDOWS

TIMELINE

1990 年 東榮公司在中国台湾省成立，推出经典 DRT 卷帘门电机系列，并且在中国台湾省已经广泛销售
1998 年 東榮公司实现战略转移， 在中国成立总部，并位于珠三角鱼米和家电之乡佛山市顺德设有研发，生产和销售部门
1999 年 東榮公司推出了 DR 卷门机系列产品，并在各地区建立了广泛的销售网络，初步在中国市场取得了成功
2002 年 東榮公司拥有独立生产线 ，并进一步扩大了生产规模。此时，DR 系列卷帘门电机在国内市场保持稳步上升态势
2004 年 東榮公司获得中国多项生产认证（含 IOS9001 等），在台湾省和中国获有 20+ 实用发明专利和商标，标志着公司在技术和质量方面得到行业内和市场认可
2005 年 東榮公司创新了交直流卷门机，成为中国国内首家交直流卷门机的生产厂家
2008 年 東榮公司完成卷帘门全系列卷帘门机 (300KG~1500KG)，平开门机全系列和 AC/DC 一体道闸机研发，生产和销售
2010 年 東榮公司的 DRT 和 DR 机型在国内市场份额拿到名列前茅的地位，成为行业内的领先企业之一
2012 年 東榮公司在中国再扩大厂房，进一步提高了公司的生产力，提升了企业形象
2016 年 東榮公司，于苏滁高科技工业园，再建立智能工厂，有助形成长三角地区的研发，生产和销售强大合力
2025 年 東榮公司推出 DRI 系列卷帘门电机（WIFI，AI 语音集合一体卷帘门电机）。确保该产品先进性，生产质量和品牌得到国内外广泛的客户认可

1990 Founded in Taiwan Province, China, Introduced the classic "DRT" roller shutter motor series, which was widely sold in Taiwan Province, China.

1998 Dong Rong Company made a strategic shift and established its headquarter in China with R&D, production and sales department in Shunde, Foshan City, the home of housing appliances.

1999 Dong Rong released the "DR" series of rolling shutter motors series, also established an extensive sales network in various regions in China market and Achieved success.

2002 Dong Rong has own production line and further expanded its production scale. At this time, the DR series of rolling door motors in the domestic market to maintain a steady upward trend.

2004 Dong Rong obtained a number of production certificates in China (including IOS9001, etc.), and was awarded 20+ utility invention patents and trademarks in Taiwan and China, which signified that the company was accepted by the industry and the market in terms of many aspects.

2005 Dong Rong innovated the DC rolling shutter motors and became the first manufacturer of DC rolling shutter motors in China.

2008 Dong Rong completed the development, manufacturing and sales for whole series of rolling shutters motors (300KG~1500KG), sliding door openers and AC/DC integrated boom barrier motors.

2010 Dong Rong company's "DRT" and "DR" models in the domestic(China) market share had get NO.1 position, become one of the leading companies in the rolling shutter motors industry.

2012, Dong Rong expanded its factory premises in China once again, thereby increasing the company's productivity and enhancing its corporate image.

2016, Dong Rong established another intelligent factory in the Suchu High-Tech Industrial Park, which helped to form a powerful synergy for R&D, production, and sales in the Yangtze River Delta region.

2025 Dong Rong launched "DRI" series rolling door motor (WIFI, AI voice integrated rolling door motor). Ensure that the advancement of the product, production quality and brand are Wide range of customers at home and abroad.



产品性能
PRODUCT FEATURES

東榮品牌智能开门机系列传动效率高，运行稳定，声音小，安全经济可靠。采用耐高温、耐磨损汽车刹车材料，经久耐用，制动安全。可调限位装置，控制门的高度幅度大。热控制系统优良，保障电机的频繁开关。主机与边板的安装方便快捷、省时省力。马达扭矩大，运行噪音低，東榮品牌各型号智能开闭机通用遥控器，采用自开发控制系统，保证控制安全，产品质量。

Dongrong brand intelligent door opener has high transmission efficiency, stable operation, low noise, safety, economy and reliability. It is made of high-temperature and wear-resistant automobile brake material, which is durable.

Use, braking safety. Adjustable limit device, the height of the control door is large. Excellent control system ensures frequent switching of the motor. Installer of main engine and side plate

It is convenient, time-saving and labor-saving, and the system is light. The motor has large starting torque and low running noise, and is equipped with automatic reset thermal protection device to ensure the safety and durability of the motor. Dongrong

The universal remote controller of intelligent opening and closing machines of various brands adopts programmable single chip microcomputer control, which is safe to control, rolling code transmitter and convenient to add.

2025-4-15-东荣电机-中英画册.indd 7-8 2025/4/16 19:22:55

東榮®
DongRong

ENTERPRISE
HONOR

» 企业荣誉

CERTFICATION

多项品牌和专利证书





QUANLIY IS THE KEY
SHARE WINNER

质量为先
合作共赢

2025-4-15-东荣电机-中英画册.indd 9-10
2025/4/16 19:22:58

CATALOGUE

09-22 / 東榮卷帘门电机系列
DongRong shutter door motor series

23-26 / 東榮平开门电机系列
Dongrong sliding Gate Opener series

27-32 / 東榮道闸电机系列
DongRong boom barrier series

33-36 / 東榮配件大全
DongRong accessories




01

AC,DC 東榮卷帘门电机系列
DR MOTOR FOR ROLLING DOOR SERIES

2025-4-15-东荣电机-中英画册.indd 11-12 2025/4/16 19:23:00

DR MOTOR FOR
ROLLING DOOR SERIES

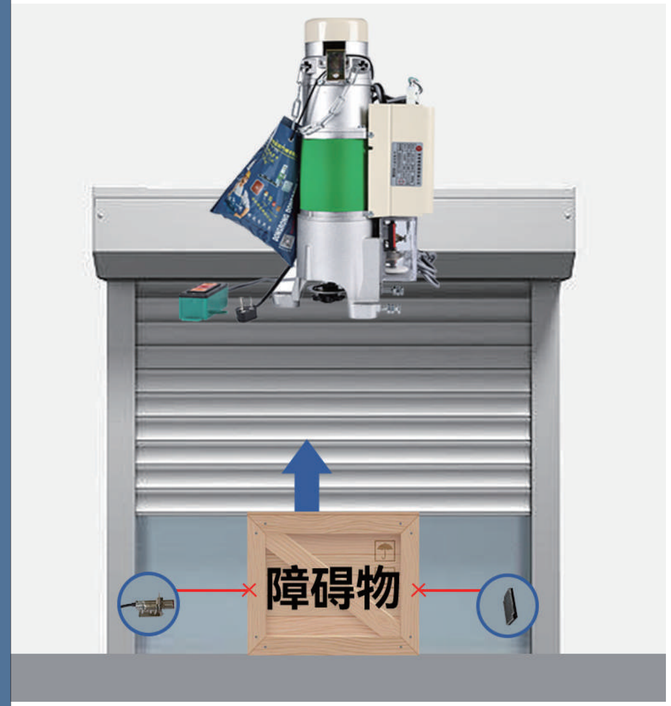

1. 快速卷帘门电机
Fast Rolling Shutter Motor

2. 极速卷帘门电机
Ultra Fast Rolling Shutter Motor


3. 机械式 / 电子式防撞卷帘门电机
Mechinal/Elec Anti-Collsion Motor

4. JDC 交直流卷帘门电机
DC Rolling Shutter Motor

5. 齿式及重型卷帘门电机
Gear Driven and Heavy-duty Motor

DR 卷帘门电机系列
DR Motor For Rolling Door

DR-200/300KG(快K)卷帘门电机
DR-200/300KG FAST ROLLING SHUTTER MOIOR

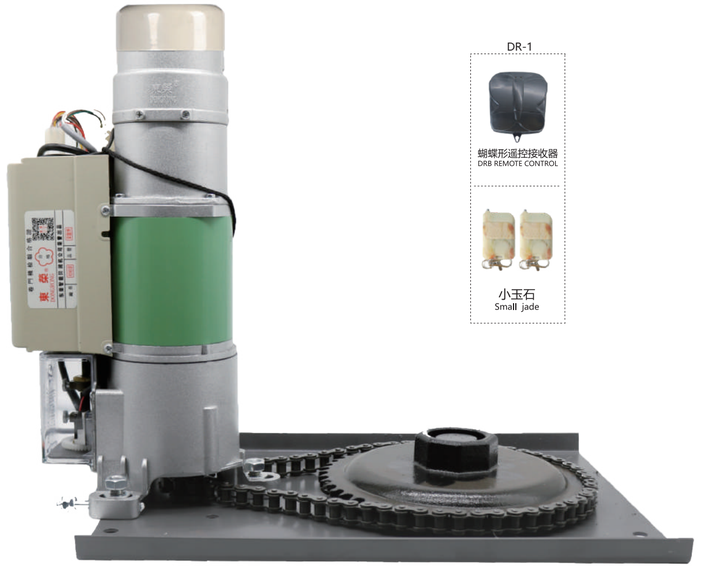

结构先进 功能齐全 可加遥控器 防撞器
防盗装置 安装轻便 造型美观

Advanced structure and complete functions can be added with remote controller for collision avoidance. Installtion is easy process and beautiful in apperance, Including security system.

WIFI 手机蓝牙控制
Wifi/Bluetooth contorl

遇阻即停
Stop when encouting obstruction

自动限位
Electronic limit

车牌识别
License plate recognition

技术参数 SPECIFICATION

型号 Model	DR-200/300/500KG(快K)
输入电源 Power supply	110V/220V
频率 Frequency	50Hz/60Hz
额定功率 Rated Power	0.46HP/340W 0.6HP/440W
最大提升重量 Max.lifting Wt	300kg/500kg
最大提升高度 Max.lifting Height	7.5m
输出速度 (r/min) Outout Rotation	4.2
传动方式 Drive	Chain/ 链条

2025-4-15-东荣电机-中英画册.indd 13-14
2025/4/16 19:23:02

DR 卷帘门电机系列
DR Motor For Rolling Door

WIFI 手机蓝牙控制
Wifi Bluetooth contorl

极速开门
Fast door opening

车牌识别
License plate recognition

DR-200KG(极J)卷帘门电机
DR-200KG UI TRA FAST ROLLING TTER MOTOR



结构先进 功能齐全 可加遥控器 防撞器防盗装置 安装轻便 造型美观

Advanced structure and complete functions can be added with remote controller for collision avoidance.
Installtion is easy process and beautiful in apperance, Including security system.

性能特点 FEATURES

① 极速卷门电机
Extreme fast door roller

两极电机，2600 转，速度比普通电机快一倍，运行噪声低。
电容马达附热保护器，故障率低。

Two phase, 2600 round prer min, rolling speed faster than normall with low noise
Capacitor motor is attached with thermal protector, motor has low failure rate.

② 10 秒提升 3 米卷帘门
10s to lift 3m Rolling Shutter Door

技术参数 SPECIFICATION

型号 Model	DR-200KG(极J)
输入电源 Power supply	220V/110V
功率 power	0.73HP/540W
最大提升重量 Max.lifting Wt	200Kg
最大提升高度 Maximum lifting height	7.5m
输出速度（r/min）output speed	10S 提升 3m 10s lift 3m

東榮 DongRong

DR 卷帘门电机系列
DR Motor For Rolling Door

机械式 / 电子式遇阻反弹卷帘门电机
MECHANICAL/ELECTRONIC ROLLING SHUTTER MOTOR

车牌识别
License plate recognition

WIFI 手机蓝牙控制
Wifi Bluetooth contorl

遇阻即停
Meet object and stop



遇阻反弹限位
Mechanical Rebound system



电子式遇阻即停
Electronic Rebound system





遇阻即停限位
Mechanical Meet object and stop system

结构先进 功能齐全 可加遥控器 防撞器防盗装置 安装轻便 造型美观

Advanced structure and complete functions can be added with remote controller for collision avoidance.
Installtion is easy process and beautiful in apperance, Including security system.

性能特点 FEATURES

①电子式限位
Electronic Limit

电子式遇阻反弹，自动调节限位。
Electronic rebound in case of resistance, automatic limit adjustment.

② 机械式限位
Mechinal Limit

机械式遇阻即停电机，在卷闸开启或关闭时遇到有人员或物品阻碍会及时停止或反弹，保护人员安全和避免闸片损坏。

The mechanical rebound system motor stops when it is blocked. When the rolling brake is Opening or closing, it will stop or rebound in time when it is blocked by people or things,for safety of people and avoid the damage of shutter pieces

技术参数 SPECIFICATION

型号 Model	DR-300/500KG
输入电源 Power supply	220V/110V
频率 Frequency	50Hz/60Hz
额定功率 Rated Power	0.46HP/340W 0.63HP/460W
最大提升重量 Max.lifting Wt	300/500KG
最大提升高度 Max.lifting Height	7.5m
输出速度（r/min）Output Rotation	4.1
传动方式 Drive	Chain 链条

DR 卷帘门电机系列
DR Motor For Rolling Door

JDC-300KG-500KG 快速交直流卷帘门电机
JDC SERIES DC-300-500KG ROLLING SHUTTER MOTOR

WIFI 手机蓝牙控制
Wifi Bluetooth contorl

遇阻即停
Meet object and stop

停电不用愁
Power Storage





控制面板
control panel



遥控器 2
Remote control 2

東榮 © (廈門) DongRong

結构先进 功能齐全 可加遥控器 防撞器防盗装置 安装轻便 造型美观

Advanced structure and complete functions can be added with remote controller for collision avoidance. Installtion is easy process and beautiful in apperance, Including security system.

选配Option (1)



小将士 1
Little soldier 1

小黑豹 1 代
Little panther 1

小黑豹 2 代
Little panther 2

机脚位 motor leg

四脚 Four -legged



三脚 Three-legged



WIFI 手机蓝牙控制
Wifi/Bluetooth contorl

遇阻即停
Meet object and stop

车牌识别
License Plate Recognition

DR 卷帘门电机系列
DR Motor For Rolling Door

JDC-600KG~800KG 四脚交直流卷帘门电机
JDC SERIES DC-600-800KG ROLLING SHUTTER MOTOR (FOUR FEET)



四脚底座
four feet stand

結构先进 功能齐全 可加遥控器 防撞器防盗装置 安装轻便 造型美观

Advanced structure and complete functions can be added with remote controller for collision avoidance. Installtion is easy process and beautiful in apperance, Including security system.

选配Option (2) (可选)

语音播报
Voice Broadcast

储电系统
Power storage


技术参数 SPECIFICATION


运行电压 Working voltage	24V	24V	24V	24V
规格 Specification	20×20×12cm	20×20×12cm	20×20×12cm	20×20×12cm
重量 Weight	6KG	6KG	6KG	6KG
颜色 Coloer				
型号 MODEL	JDC-300	JDC-500	JDC-600	JDC-800
输入电源 INPUT VOLTAGE	220V/110V	220V/110V	220V/110V	220V/110V
频率 FREQUENCY	50HZ/60HZ	50HZ/60HZ	50HZ/60HZ	50HZ/60HZ
额定功率 (W) RATE POWER	250W	370W	450W	550W
最大提升高度 Max.Lifting Weight	7.5m	7.5m	7.5m	7.5m
最大提升重量(KG) Max.Lifting Height	300 ±3%	500 ±3%	600 ±3%	800 ±3%
输出速度 (r/min) Speed	5.2	5.2	5.2	5.2
传动方式 Driven Type	链条 / Chain	链条 / Chain	链条 / Chain	链条 / Chain

DR 卷帘门电机系列
DR Motor For Rolling Door

齿式卷帘门电机
GEAR TYPE ROLLER SHUTTER MOTOR

WIFI 手机蓝牙控制
Wifi Bluetooth contorl







800 公斤齿式卷帘门电机
800KG GEAR TO GEAR
ROLLING SHUTTER MOTOR



600 公斤齿式卷帘门电机
600KG GEAR TO GEAR
ROLLING SHUTTER MOTOR

DR-2



蝴蝶形遥控接收器
DRB REMOTE CONTROL



小黑豹 2代
Little Panther II

東榮 © DongRong

结构先进 功能齐全 可加遥控器 防撞器防盗装置 安装轻便 造型美观

Advanced structure and complete functions can be added with remote controller for collision avoidance. Installtion is easy process and beautiful in apperance, Including security system.

性能特点 FEATURES

① 齿式 600/800 四脚卷帘门电机，安全稳定（可定制三脚）
Gear type 600/800 Rolling shutter motor, stable while working

四脚电机更安全可靠，噪音小，质量可靠。
Four-legged motor is safer and more reliable. Low noise and reliable quality.

齿轮电机更加坚固耐用，安全可靠；刹车装置制动准确，台湾原装机芯。
DR Gear type motor is more durable and safe ; Braking device braking accurately, From Taiwan original movement


技术参数 SPECIFICATION

型号 Model	DR-600KG-800KG
输入电源 Power supply	110V/220V
频率 Frequency	50/60Hz
额定功率 Rated Power	63/100HP 463W 3/4HP 551W
最大提升重量 Max.lifting Wt	600kg/800kg±4%
最大提升高度 Max.lifting Height	7.5m(600kg)/10-12m(800kg)
输出速度（r/min）Output Rotation	4.2/5.5
传动方式 Drive	Gear/ 齿轮

DR 卷帘门电机系列
DR Motor For Rolling Door

重型 800KG-1000KG 卷帘门电机
VY-DUTY 800KG-1000KG ROLL MOTOR

WIFI 手机蓝牙控制
Wifi Bluetooth contorl

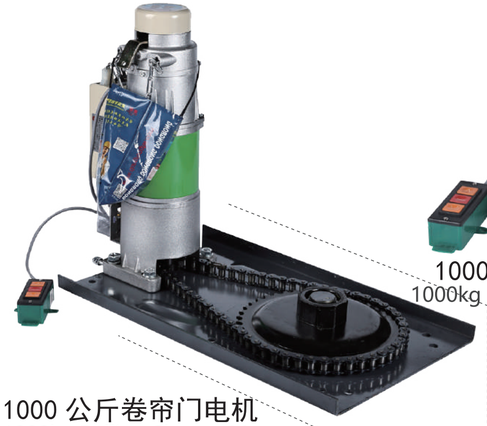

1000 公斤卷帘门电机
1000kg Rolling Shutter Motor



1000 公斤卷帘门电机
1000kg Rolling Shutter Motor

结构先进 功能齐全 可加遥控器 防撞器防盗装置 安装轻便 造型美观

Advanced structure and complete functions can be added with remote controller for collision avoidance. Installtion is easy process and beautiful in apperance, Including security system.

性能特点 FEATURES

① 800kg-1000kg 四脚卷门电机安全稳定（可定制三脚）
800-1000kg heavy duty motor，can make in three feet

四脚电机更安全可靠，噪音小，质量可靠。
Four-legged motor is safer and more reliable. Low noise and reliable quality.

技术参数 SPECIFICATION


型号 Model	DR-800/1000Kg
输入电源 Power supply	110V/220V/380V
频率 Frequency	50Hz/60Hz
额定功率 Rated Power	0.93HP 680W 1.01HP 740W
最大提升重量 Max.lifting Wt	800/1000Kg±4%
最大提升高度 Max.lifting Height	10/12m(800KG)
输出速度（r/min）Output Rotation	5.5/5.5
传动方式 Drive	Gear/Chain 链条 / 齿轮


DR 卷帘门电机系列
DR Motor For Rolling Door

1300-1500KG 380V 重型三脚卷帘门电机
HEAVY THREE-LEGGED ROLLING SHUTTER MOTOR

WIFI 手机蓝牙控制
Wifi Bluetooth contorl








380v 防错相保护



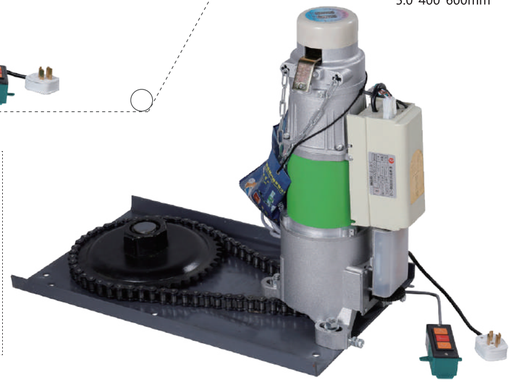

東榮® DongRong

结构先进 功能齐全 可加遥控器 防撞器
防盗装置 安装轻便 造型美观

Advanced structure and complete functions can be added with remote controller for collision avoidance.
Installtion is easy process and beautiful in apperance, Including security system.

性能特点 FEATURES

① 380V 重型电机
380V Heavy Duty Motor

马达起动力大，噪音低，结构坚固；
马达附热保护器，故障率低。
The motor has large torque and low noise;
motor is attached with thermal protector, moter has low failure rate.

② 错相保护装置
Misphase Protection Device

防止安装时候接错线导致电机烧
毁，自研发自纠检测系统，以保
证卷闸不会反卷，更加安全
To prevent incorrect connections of the neutral wire or ground wire during installation, which may lead to motor burnout, we have developed our own detection system to ensure installation safety.

技术参数 SPECIFICATION


型号 Model	DR -1300-1500KG
输入电源 Power supply	380V/440V
频率 Frequency	50Hz/60Hz
额定功率 Rated Power	1.39HP/1020W 1.5HP/1100W
最大提升重量 Max.lifting Wt	1300kg-1500kg±4%
最大提升高度 Max.lifting Height	10/12m
输出速度（r/min）Outout Rotation	6.4/6.8
传动方式 Drive	Chain/ 链条


DR 卷帘门电机系列
DR Motor For Rolling Door

2T~3T 超重型卷帘门电机
2T~3T ULTRA HEAVY-DUTY ROLLING SHUTTER MOTOR





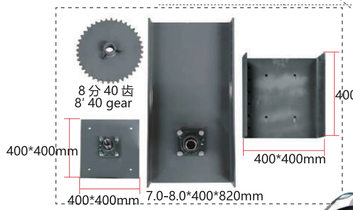

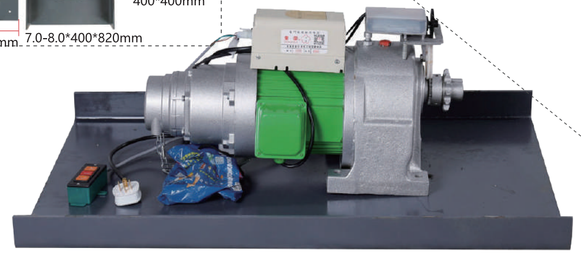

2T~3T超重型卷帘门电机
2T~3T Ultra heavy duty Rolling shutter motor

结构先进 功能齐全 可加遥控器 防撞器防盗装置 安装轻便 造型美观

Advanced structure and complete functions can be added with remote controller for collision avoidance.
Installtion is easy process and beautiful in apperance, Including security system.

性能特点 FEATURES

① 380V 重型电机
380V Heavy Duty Motor

马达起动力大，噪音低，结构坚固；
马达附热保护器，故障率低。
The motor has large torque and low noise;
motor is attached with thermal protector, moter has low failure rate.

② 错相保护装置
Misphase Protection Device

防止安装时候接错相导致电机烧
毁，自研发自纠检测系统，以保
证卷闸不会反卷，更加安全
To prevent incorrect connections of the neutral wire or ground wire during installation, which may lead to motor burnout, we have developed our own detection system to ensure installation safety.

技术参数 SPECIFICATION

型号 Model	DR-2T/2.5T
输入电源 Power supply	380V/440V
频率 Frequency	50/60Hz
额定功率 Rated Power	600w/2.17HP 2700W/3.67HP
最大提升重量 Max.lifting Wt	2000kg±5%
最大提升高度 Max lifting height	10/12m
输出速度（r/min）output speed	7.2
传动方式 Drive	Chain/ 链条

DR 卷帘门电机系列
DR Motor For Rolling Door

DRY-300-600KG 卷帘门电机
DRY-300-600KG ROLLING SHUTTER MOTOR

WIFI 手机蓝牙控制
Wifi Bluetooth contorl





小飞将
Little Pilot



DR-Y 遥控接收器
DR-Y Receiver



300-600KG 卷帘门电机
300-600KG Rolling Shutter Motor

结构先进 功能齐全 可加遥控器 防撞器 防盗装置 安装轻便 造型美观

Advanced structure and complete functions can be added with remote controller for collision avoidance.Installtion is easy process and beautiful in apperance, Including security system.

性能特点 FEATURES

1.220V 卷帘门电机（可定制 4 脚）
220v rolling shutter motor(Customizable 4-angle machine feet)

2. 可配遇阻即停
Can customize stop when encountering object

3. 可配多重齿轮比结构，提升闸门速度
Can be equipped with multiple gear ration to increase speed

技术参数 SPECIFICATION

型号 MODEL	DRY-300	DRY-500	DRY-600
输入电源 INPUT VOLTAGE	220V/110V	220V/110V	220V/110V
频率 FREQUENCY	50HZ/60HZ	50HZ/60HZ	50HZ/60HZ
额定功率 (w) RATE POWER	388W	520W	580W
最大提升高度 Max.Lifting Weight	7.5m	7.5m	7.5m
最大提升重量(KG) Max.Lifting Height	300 ±3%	500 ±3%	600 ±3%
输出速度（r/min） Speed	4.1	4.1	4.1
传动方式 Driven Type	链条 / Chain	链条 / Chain	链条 / Chain

DR 卷帘门电机系列
DR Motor For Rolling Door

DRY-700-1500KG 重型卷帘门电机
DRY-700-1500KG HEAVY DUTY ROLLING SHUTTER MOTOR

WIFI 手机蓝牙控制
Wifi Bluetooth contorl

DR-3





智能接收器
Smart Receiver

出口装



小将士 -2 代
Little Soldiers II

700-1500KG 卷帘门电机
700-1500KG Rolling Shutter Motor

结构先进 功能齐全 可加遥控器 防撞器防盗装置 安装轻便 造型美观

Advanced structure and complete functions can be added with remote controller for collision avoidance.
Installtion is easy process and beautiful in apperance, Including security system.

性能特点 FEATURES

① 700kg-1500kg 四脚卷门电机（可定制四脚）
700-1500kg heavy duty motor ,can costomize 4 feet

四脚电机更安全可靠可加配漏电开关、选配机械式防撞开关，噪音小，质量可靠。
Four-legged motor is safer and more reliable. It can be equipped with leakage switch and mechanical anti-collision switch.Low noise and reliable quality.

技术参数 SPECIFICATION

型号 MODEL	DRY-800	DRY-1000	DRY-1000 (380v)	DRY-1300 (220v)	DRY-1500
输入电源 INPUT VOLTAGE	220V 110V 380V	380V	220V	380V	380V
频率 FREQUENCY	50Hz 60Hz	50Hz 60Hz	50Hz 60Hz	50Hz 60Hz	50Hz 60Hz
额定功率 (w) RATE POWER	640W	740W	820W	1020W	1100W
最大提升高度 Max.Lifting Weight	10m 12m	10m 12m	10m 12m	10m 12m	10m 12m
最大提升重量(KG) Max.Lifting Height	800±3%	1000±3%	1000±3%	1300±3%	1500±3%
输出速度（r/min） Speed	5.5	5.5	5.5	5.5	5.5
传动方式 Driven Type	链条 Chain	链条 Chain	链条 Chain	链条 Chain	链条 Chain

2025-4-15-东荣电机-中英画册.indd 23-24
2025/4/16 19:23:20

边板，边板配件 FLANGE,FLANGE ACCESSORIES

DR 系列

DR-300/500 边板 DR 300~500 FLANGE



配合 FIT FOR	规格 SIZE	齿数 Number of gear	节数 LINK	齿距 PITCH
DR-300/500 JDC-300/500/600	360x500	50	64	5
	360x490	50	64	5
	280x410	40	74	5
	400x530	50	64	5

齿式边板 DR GEAR TYPE FLANGE



配合 FIT FOR	规格 SIZE	主齿 Main Gear	副齿 Side Gear	齿距 PITCH
DR- 齿式 DR-GEAR TYPE	330x500	M5-50	M5-19	5

DR-600/800 边板 （四脚） DR 600~800 FLANGE （SQUARE STAND）



配合 FIT FOR	规格 SIZE	齿数 Number of gear	节数 LINK	齿距 PITCH
DR-600	330x500	50	64	5
DR-800	330x560	43	58	6
JDC-800	360x560	50	68	5

DR-1000~1500 边板 DR 1000~1500 FLANGE



配合 FIT FOR	规格 SIZE	齿数 Number of gear	节数 LINK	齿距 PITCH
DR-1000~1500	360x600	43	64	6

防断链边板 ANTI-FALLING FLANGE



配合 FIT FOR	规格 SIZE	齿数 Number of gear	节数 LINK	齿距 PITCH
DR-300/500/600/800	330x600	50	74	5
DR-1000/1300/1500	360x600	50	64	5
DR-1000/1300/1500	400x600	50	64	5

齿距 PITCH

中国标准 Chinese Unit	英制 Imperial Unit	公制 Metric Unit(mm)
4′	1/2″	12.70
4.5′	9/16″	14.29
5′	5/8″	15.88
5.5′	11/16″	17.46
6′	3/4″	19.05
6.5′	13/16″	20.64

DRY 系列

DRY-300/400/500/600 边板 DRY-300/400/500/600 FLANGE



配合 FIT FOR	规格 SIZE	齿数 Number of gear	节数 LINK	齿距 PITCH
DRY-300/400/500/600	360x520	50	64	5
	400x530	50	64	5
	360x560	50	68	5
	360x520	50	64	5

DRY-300~1500 边板 DRY-300-1500 TRIANGLE FLANGE



配合 FIT FOR	规格 SIZE	齿数 Number of gear	节数 LINK	齿距 PITCH
DRY-300/400/500	360x520	50	64	5
DRY-600	360x520	50	64	5
DRY-700/800/1000	360x560	43	58	5
DRY-1300/1500	360x600	43	64	6


DRY-700/800/1000/1300/1500 边板 DRY-700/800/1000/1300/1500FLANGE



配合 FIT FOR	规格 SIZE	齿数 Number of gear	节数 LINK	齿距 PITCH
DRY-600	360x520	50	64	5
DRY-700/800/1000	360x560	43	58	6
DRY-1300/1500	360x600	43	64	6


卷门机边板 FLANGE SIZE

DRY,DR 副板 DRY,DR SIDE FLANGE




配合 FIT FOR	规格 SIZE
DR-300/500	330x330
DRY-300/400/500	360x360

DRY,DR 副板 DRY,DR SIDE FLANGE




配合 FIT FOR	规格 SIZE
DR-300/500	330x330
DRY-300/400/500	360x360

DRY,DR 副板 DRY,DR SIDE FLANGE



配合 FIT FOR	规格 SIZE
DR-300/500	330x330
DRY-300/400/500	360x360
DR/DRY-700/800/1000	400x400

DRY/DR-1000/1300/1500 副板 DRY/DR-1000~1500 SIDE FLANGE



配合 FIT FOR	规格 SIZE
DRY-1300/1500	400x400

齿轮选配 Flange Gear Type



两卡齿轮
5 分 50 齿轮 /6 分 43 齿轮
5-inch pitch diameter gear with 50 gear
6-inch pitch diameter gear with 43 gear




三卡齿轮
5 分 50 齿
5-inch pitch diameter gear with 50



快速齿轮
5 分 40 齿
6-inch pitch diameter gear with 40 gear



八角齿轮
5 分 50 齿
5-inch pitch diameter gear with 50 gear



圆八角
Circle shape with 64 gear

其他 others




轴承托



6207
(Φ80xΦ40x18)
1.3~2.0万两轴承



宽装轴承
(Φ55xΦ35x20.5)



不锈钢锁盒

标配 Standard Accessories



4寸圆饼(Φ108)



4寸直八角(Φ108)



4寸八角(Φ108)



5寸圆饼(Φ132)



5寸直八角(Φ132)



5寸八角(Φ132)



6寸圆饼(Φ154)



6寸直八角(Φ154)



6寸八角(Φ154)

选配 Other Flange Accessories



普通包装轴(Φ35*155)



800Kg包装轴(Φ40*180)



1000Kg包装轴(Φ40*230)



1500Kg包装轴(Φ40*230)



6寸三角(Φ154)



5寸三角(Φ132)



4寸三角(Φ108)

2025-4-15-东荣电机-中英画册.indd 25-26 2025/4/16 19:23:26



02

AC,DC東榮智能平移门电机系列

DR MOTOR FOR SLIDING GATE OPENER



一体式 WIFI 控制面板
Built-in Wifi control panel

AC/DC 平移门电机
AC/DC Sliding Gate Opener

2025-4-15-东荣电机-中英画册.indd 27-28 2025/4/16 19:23:29

DR 开平电机系列
DR Motor For Sliding Gate Opener

DC（24V）平移门电机
DC (24V) SLIDING DOOR MOTOR

可外接太阳能储电板
External solar power storage panel

细节
Details



墙壁控制器
Wall-stick control panel

齿条
Rack

DC 控制箱
Power Storage Control Box

小黑豹 2代
Little Panther II

结构先进 功能齐全 可加遥控器 防撞器
防盗装置 安装轻便 造型美观

Advanced structure and complete functions can be added with remote controller for collision avoidance.
Installtion is easy process and beautiful in apperance, Including security system.

自动限位 / 机械限位（选配）
Mechinal/Automatic Limit(Select one)

手机控制
Mobile control

遇阻即停
Stop when meet objection

慢启慢停
Slow start slow stop

技术参数 SPECIFICATION

型号 Model	DRL-AC/DC-800-1500KG
输入电源 Power supply	110V/220v/230v
运行电压 Working Power	24V
功率 Power	550W/750W/1000W/1500W
最大门重 Max Door Weight	800/1000/1200/1500Kg
额定开门速度 Rated Operation Speeed	0.2m/s
工作温度 Working Temperature	-35 to +55
功率 Frequency	550W

可选颜色 Colour

東榮 © DongRong

DR 880 开平电机系列
DR-880 Motor For Sliding Gate Opener

AC（220V）平移门电机
AC (220V) SLIDING DOOR MOTOR



细节
Details

小黑豹 2代
Little Panther II

WIFI 模块
wifi module

红外线探头
Infrared senor

结构先进 功能齐全 可加遥控器 防撞器
防盗装置 安装轻便 造型美观

Advanced structure and complete functions can be added with remote controller for collision avoidance.
Installtion is easy process and beautiful in apperance, Including security system.

遇阻即停
Stop when meet objection

慢启慢停
Slow start slow stop


遇阻力度可调
Adjustable resistance

WIFI 手机蓝牙控制
Wifi Bluetooth contorl

技术参数 SPECIFICATION

型号 Model	DR-AC-600KG
输入电源 Power supply	110V~220v
功率 Power	370W
最大门重 Max Door Weight	600Kg
额定开门速度 Rated Operation Speeed	0.2m/s
工作温度 Working Temperature	-35 to +55

2025-4-15-东荣电机-中英画册.indd 29-30
2025/4/16 19:23:35

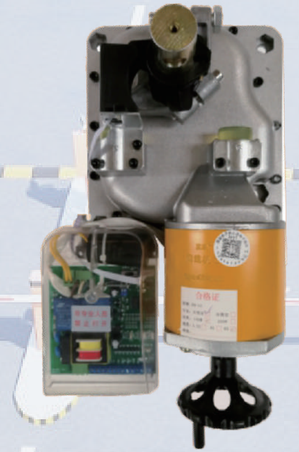

03

東榮智能一体道闸机系列

DR MOTOR FOR BOOM BARRIER

车牌识别系统



DR 道闸机系列
DR Motor For Boom Barrier

AC 一体式道闸机芯
AC BUILT-IN MOTOR WITH CONTORL BOX

① 经济实惠 传动高效
ECONOMICAL AND EFFICIENT TRANSMISSION





结构先进 功能齐全 可加遥控器 防撞器
防盗装置 安装轻便 造型美观

Advanced structure and complete functions can be added with remote controller for collision avoidance.
Installtion is easy process and beautiful in apperance, Including security system.

WIFI 手机蓝牙控制
Wifi Bluetooth contorl

选配Option



镜式红外探头
Mirror infrared probe



可匹配车牌识别系统
Able to fit in any car plate recognition system

技术参数 SPECIFICATION

型号 Model	DRB-AC-220V
输入电源 Power supply	220V/110V
频率 Frequency	50Hz/60Hz
额定功率 Rated Power	120W
规格 Specifications	200*380*260

東榮® (臺灣) DongRong

DR 道闸机系列
DR Motor For Boom Barrier

DC 一体式道闸机芯
DC BUILT-IN MOTOR WITH CONTORL BOX





结构先进 功能齐全 可加遥控器 防撞器
防盗装置 安装轻便 造型美观

Advanced structure and complete functions can be added with remote controller for collision avoidance.
Installtion is easy process and beautiful in apperance, Including security system.

快速启动
Fast raising

WIFI 手机蓝牙控制
Wifi Bluetooth contorl

选配Option



蓝牙到场自动开门装置
Blueteeth On-site auto door opener device



可配地感系统
Able to math groud sensing system

技术参数 SPECIFICATION

型号 Model	DRB-DC24V
输入电源 Power supply	220V/110V
频率 Frequency	50Hz/60Hz
额定功率 Rated Power	120W
规格 Specifications	180*200*360
电机输入电压 Motor power supply	24V

DR 道闸机系列
DR Motor For Boom Barrier

道闸机箱款式定制 CUSTOMIZED BARRIER GATE CABINET DESIGN

ⓘ 最长可定制 6 米 UP TO 6 METERS, ARM CAN BE CUSTOMIZED.




直杆道闸

| 技术参数 technical parameter
适用场所 Applicable place：工厂、企业、学校、机关、住宅等。
机箱规格 Chassis specification（长 * 宽 * 高）:380*200*260
电压 Voltage：220V
频率 Frequency：50Hz/60Hz
功率 Power：100W
| 颜色 colour

栏栅道闸（单层杆）



栏栅道闸（双层杆）

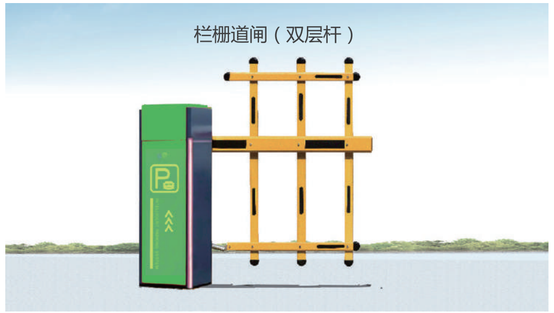

東榮 © DongRong



OH

東榮卷帘门配件系列
DR ROLLING SHUTTER MOTOR ACCESSORIES

DR 卷帘门全系列

DR MOTOR FOR ROLLING DOOR SERIES

参数一览表 PARAMETER LIST

型号 MODEL	输入电压(V)INPUT VOLTAGE	频率(HZ) FREQUENCY	额定功率(W)RATE POWER	电流(A) ELECTRICITY	扭力(N.m) TORQUE	马 力 (P) HORSEPOWER	转速 (RPM) SPEED	最大提升力(KG) Max Lifting Weight	最大提升高度 (M) Max Lifting Height	边板主板尺寸 Main Flange Size	副板尺寸 Side Flange Size	齿数 Number of gear	节数 LINK
B、C型500L	220	50	430	2.4	2.77	0.58	1480	500(5寸)	7	3.0*330*510	3.0*330*330	50齿	64L
B、C型600L	220	50	460	2.75	2.97	0.623	1480	600(5寸)	7	3.0*330*510	3.0*330*330	50齿	64L
200KG(极J)	220	50	540	2.4	1.84	0.73	2800	200(4寸/5寸)	7	3.0*360*485	3.0*360*360	50齿	64L
200KG(快K)	220	50	340	1.6	2.2	0.46	1480	200(4寸/5寸)	7	3.0*360*485	3.0*360*360	50齿	64L
300KG(快K)	220	50	440	2	2.8	0.6	1480	300(4寸/5寸)	7	3.0*360*485	3.0*360*360	50齿	64L
DR-300KG	220	50	340	1.6	2.2	0.46	1480	300(4寸/5寸)	7	3.0*360*485	3.0*360*360	50齿	64L
DR-500KG	220	50	460	2.1	2.97	0.63	1480	500(4寸/5寸)	7	3.0*360*485	3.0*360*360	50齿	64L
DR-600KG	220	50	480	2.3	3.1	0.65	1480	600(4寸/5寸)	7	3.75*330*500	3.0*360*360	50齿	64L
DR-800KG	220	50	680	3.2	6.76	0.93	960	800(6寸)	8.5	3.75*330*560	4.75*330*330	43齿	58L
DR-1T	220	50	740	3.7	7.36	1.01	960	1000(6寸)	8.5	4.75*360*600	4.75*360*360	43齿	64L
DR-1T	380	50	820	1.8	8.16	1.12	960	1000(6寸)	8.5	4.75*360*600	4.75*360*360	43齿	64L
DR-1.3T	380	50	1020	2.06	10.15	1.39	960	1300(6寸)	12	4.75*400*600	4.75*400*400	43齿	64L
DR-1.5T	380	50	1100	2.2	10.94	1.5	960	1500(6寸)	12	4.75*400*600	4.75*400*400	43齿	64L
DR-2T	380	50	1600	3.5	11.5	2.18	1480	2000(6寸)	12	8*822*510	8*400*400	40齿	60L
DR-3T	380	50	2600	5.5	16.78	3.54	1480	3000(6寸)	12	10*822*510	10*400*400	40齿	60L
DRY系列													
DRY-300L	220	50	340	1.75	1.76	0.46	1480	300(4寸)	7	3.75*360*520 3.75*360*530	3.75*360*360	50齿	64L
DRY-500L	220	50	470	2.2	3	0.63	1480	500(4寸)	7	3.75*360*520 3.75*360*530	3.75*360*360	50齿	64L
DRY-300KG	220	50	388	1.6	2.5	0.53	1480	300(4寸)	7	3.75*360*520 3.75*360*530	3.75*360*360	50齿	64L
DRY-400KG	220	50	450	2.1	2.9	0.61	1480	400(4寸)	7	3.75*360*520 3.75*360*530	3.75*360*360	50齿	64L
DRY-500KG	220	50	520	2.2	3.36	0.71	1480	500(4寸)	7	3.75*360*520 3.75*360*530	3.75*360*360	50齿	64L
DRY-600KG	220	50	580	2.25	3.74	0.79	1480	600(4寸)	7	3.75*360*520 3.75*360*530	3.75*360*360	50齿	64L
DRY-800KG	220	50	640	3、2	6.37	0.87	960	800(5寸)	8.5	4.75*400*560 4.75*400*600	4.75*400*400	43齿	58L/64L
DRY-1T	220	50	740	3、7	7.36	1.01	960	1000(5寸)	8.5	4.75*400*560 4.75*400*600	4.75*400*400	43齿	58L/64L
DRY-1T	380	50	820	1.8	8.16	1.12	960	1000(5寸)	8.5	4.75*400*560 4.75*400*600	4.75*400*400	43齿	58L/64L
DRY-1.3T	380	50	1020	2.06	10.15	1.39	960	1300(5寸)	12	4.75*400*600	4.75*400*400	43齿	64L
DRY-1.5T	380	50	1100	2.2	10.94	1.5	960	1500(6寸)	12	4.75*400*600	4.75*400*400	43齿	64L
DRY-2T	380	50	1600	3.5	11.5	2.18	1480	2000(6寸)	12	8*822*510	8*400*400	40齿	60L
DRY-3T	380	50	2600	5.5	16.78	3.54	1480	3000(6寸)	12	10*822*510	10*400*400	40齿	60L
110V系列													
300KG	110	60	520	4.7	3.36	0.71	1480	300(4寸/5寸)	7	3.0*360*485	3.0*360*360	50齿	64L
500KG	110	60	590	5.2	3.81	0.8	1480	500(4寸/5寸)	7	3.0*360*485	3.0*360*360	50齿	64L
600KG	110	60	650	5.8	4.19	0.88	1480	600(4寸/5寸)	7	3.75*330*500	3.0*360*360	50齿	64L
800KG	110	60	940	9	9.35	1.28	960	800(6寸)	8.5	3.75*330*560	4.75*330*330	43齿	58L

配件自动化

Automation For Accessories

配件 Accessories



155 轴
155axis
36x155mm



800KG 长轴
800KG Long shaft
42x180mm

2 吨轴
2-Ton Axle
45x300mm



按钮开关
Button Switch



按钮开关
Button Switch with screw



锁盒 1
Lock Box 1



加长行程架
Limit Switch combo
extra lay(12METERS)



防断链鸭子头
ANTI-BREAK CHAIN STOPPER



锁盒 2
Lock Box 2



U 型托
U-Bracket




线路板
Circuit Board



轴承托
Barring Bracket



边板轴承
Side Flange Bearing



行程架
Limit Switch combo
(6.5/7.5METERS)



轴承碗
Bearing Bowl

2025-4-15-东荣电机-中英画册.indd 37-38 2025/4/16 19:24:11

遥控器 / 其他探头设备
Remote control/other probe equipment



小飞将　Little Pilot
可做 433，315,365HZ, 全自研加密发射器
Can do 433, 315, 365, Hz, self-develope remotes



小黑豹 1 代　Little Panther I
可做 433，315,365HZ, 全自研加密发射器
Can do 433, 315, 365, Hz, self-develope remotes



小黑豹 2 代　Little Panther II
可做 433，315,365HZ, 全自研加密发射器
Can do 433, 315, 365, Hz, self-develope remotes



小黑豹 3 代　Little Panther III
可做 433，315,365HZ, 全自研加密发射器
Can do 433, 315, 365, Hz, self-develope remotes



小将士 -1 代　Little Soldiers I
可做 433, 315, 365HZ, 全自研加密发射器
Can do 433, 315, 365, Hz, self-develope remotes



小将士 -2 代　Little Soldiers II
可做 433, 315, 365HZ, 全自研加密发射器
Can do 433, 315, 365, Hz, self-develope remotes



小玉石　Little Jade
可做 433, 315, 365HZ, 全自研加密发射器
Can do 433, 315, 365, Hz, self-develope remotes



蓝牙到场自动开门装置
Blueteeth On-site auto door opener device

東榮®(廈潮)
DongRong

配件自动化
Automation For Accessories

遥控器 / 其他探头设备
Remote control/other probe equipment



墙壁控制器　Wall-stick control panel
全自研面板
Self-develope control panel



DR-1/2 蝴蝶形遥控接收器
DR-1/2 Remote Receiver
全自研接收装置
Self-develope receiver





DR-Y 遥控接收器
DR-Y Remote Receiver
全自研接收装置
Self-develope receiver



一体式 WIFI 控制面板　WIFI Control Panel
全自研 WIFI 控制面板
Self-develope wifi control panel



双线红外线探头
Double wire Infrared Sensor
探头设备
Probe device



10 米单镜红外线探头
10m Single Mirror Infrared Sensor
探头设备
Probe device



5 米单镜红外线探头
5m Single Mirror Infrared Sensor
探头设备
Probe device



DR-380v　Three-phase Receiver
380v 三相全自研接收器
Self-develope three phase receiver

2025-4-15-东荣电机-中英画册.indd 39-40
2025/4/16 19:24:21